

DELA





## DELA

DELA is designed for any indoor spaces with a modern simplicity style. The soft secondary optics design and un-dazzling light is causing a cozy and stress-free atmosphere. With a modern simplicity style it is suitable for leisure spaces especially for hotels, villas, etc.



### MULTI REFLECTOR COLOR OPTIONAL

Multi color choose of the reflector ,Ivory white , Flax silver , Moonlight silver ,Blinding Black , Deep space black and Agate black.



### FLEXIBLE INSTALLATION

with 5 different size of the cutting hole, 55mm, 75mm, 95mm,125mm ,150mm






RA  
High CRI up to 97




### RELIABLE

Branded component ensure the lighting have reliable quality.




Product series	DELA
Application areas	Accent lighting
Pan/tilt range	35° tilted
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour, 3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.21kg
Test seal	

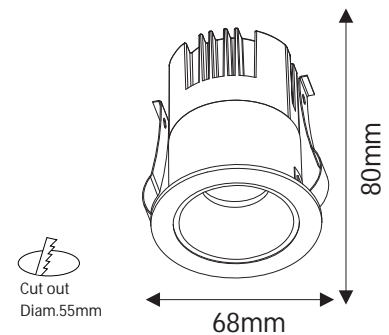


### Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	size	Beam Angle	CRI	FUNTION
GMC225	7W	120LM/W	55mm	68*H80mm	15°/24°/38°	90	ON/OFF DIM/DALI


15°-3000K-CRI90

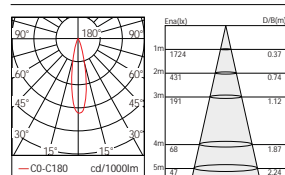

24°-3000K-CRI90

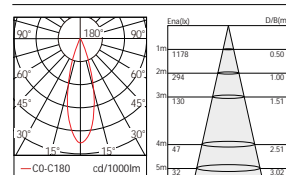

38°-3000K-CRI90

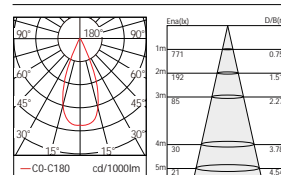


### Accessories




SOLITE  
SOFTENING  
LENS



HONEY  
COMB


Product series	DELA
Application areas	Accent lighting
Pan/tilt range	35° tilted
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour, 3500K, 4000K
Cooling	passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.35kg
Test seal	

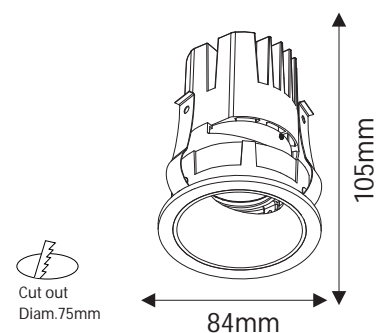


### Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	size	Beam Angle	CRI	FUNTION
GMC227	12W	120LM/W	75mm	84*H105	15°/24°/38°	90	ON/OFF DIM/DALI


15°-3000K-CRI90

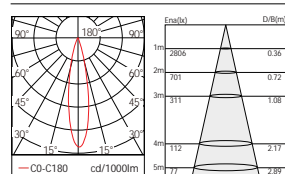

24°-3000K-CRI90

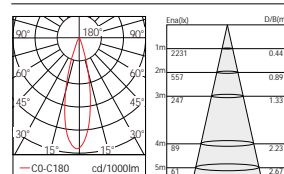

38°-3000K-CRI90

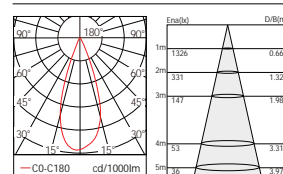


### Accessories




SOLITE  
SOFTENING  
LENS



HONEY  
COMB


Product series	DELA
Application areas	Accent lighting
Pan/tilt range	35° tilted
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour, 3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.64kg
Test seal	

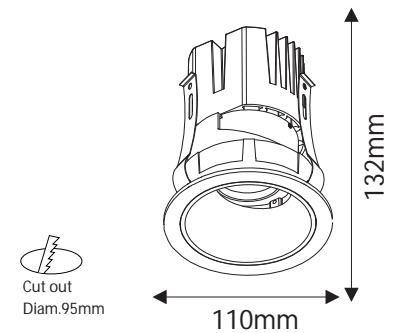


### Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	size	Beam Angle	CRI	FUNTION
GMC229	22W	120LM/W	95mm	110*H132mm	15°/24°/38°	90	ON/OFF DIM/DALI


15°-3000K-CRI90

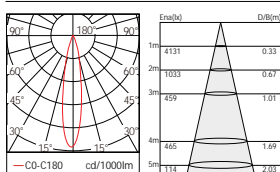

24°-3000K-CRI90

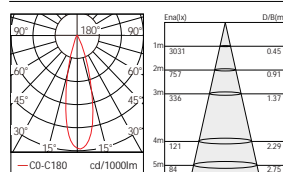

38°-3000K-CRI90

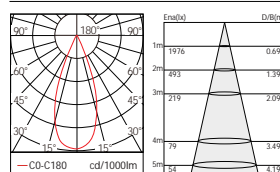

### Accessories





SOLITE  
SOFTENING  
LENS



HONEY  
COMB




Product series	DELA
Application areas	Accent lighting
Pan/tilt range	35° tilted
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour,3500K, 4000K
Cooling	passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 1kg
Test seal	

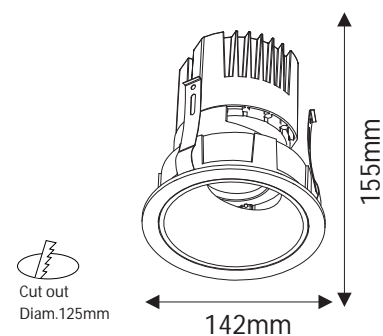


### Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	size	Beam Angle	CRI	FUNTION
GMC220	32W	120LM/W	125mm	142*H155mm	15°/24°/38°	90	ON/OFF DIM/DALI


15°-3000K-CRI90

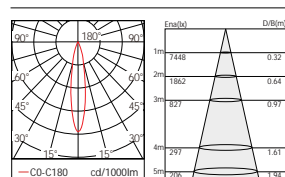

24°-3000K-CRI90

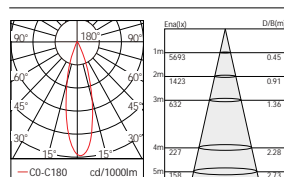

38°-3000K-CRI90

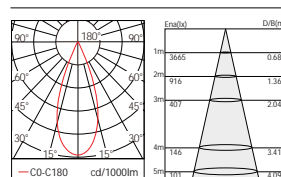


### Accessories




SOLITE  
SOFTENING  
LENS



HONEY  
COMB


Product series	DELA
Application areas	Accent lighting
Pan/tilt range	35° tilted
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 1.2kg
Test seal	

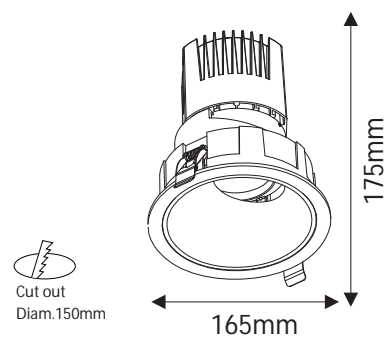


### Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	size	Beam Angle	CRI	FUNTION
GMC223	40W	120LM/W	150mm	165*H175mm	15°/24°/38°	90	ON/OFF DIM/DALI


15°-3000K-CRI90

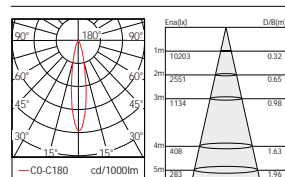

24°-3000K-CRI90

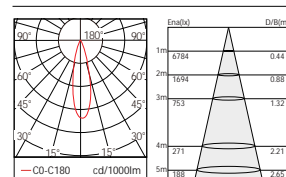

38°-3000K-CRI90

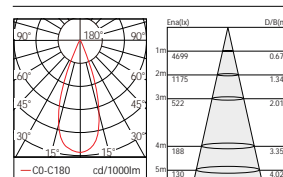

### Accessories



SOLITE  
SOFTENING  
LENS



HONEY  
COMB