

LOLLO





LOLLO





LOLLO series is extra slim trime only 2.5mm for the frame, and embedded deep anti-glare lamps. For full family size from 40mm, 50mm, 55mm, 60mm, 75mm and from 7W to 15W. It's a comprehensive series meet different application.






The high reflectivity of the mirror anti-glare ring enables Lollo to achieve science-fiction de-glare performance.


UNIQUE DESIGN
 Embedded deep anti glare sky lantern
 Modular structure design

LOW GLARE
 Second reflective deep anti glare design
 UGR<17

FLEXIBLE
 It modula design which can easy installation replace the light without any damage to the ceiling .



Product series	LOLLO
Application areas	Accent lighting
Pan/tilt range	Fixed
Mounting	SURFACE MOUNTED
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.23kg
Test seal	    



Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	size	Beam Angle	FUNTION
GMA142	5W	120LM/W	40mm	46*65mm	15°/24°/36°	ON/OFF DIM/DALI/0-10V

15°-3000K-CRI90

24°-3000K-CRI90

36°-3000K-CRI90




Accessories




SOLITE
SOFTENING
LENS



HONEY
COMB

Product series	LOLLO
Application areas	Accent lighting
Pan/tilt range	Fixed
Mounting	SURFACE MOUNTED
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.36kg
Test seal	




Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	size	Beam Angle	FUNTION
GMA142	7W	120LM/W	40mm	46*80mm	15°/24°/36°	ON/OFF DIM/DALI/0-10V

15°-3000K-CRI90

24°-3000K-CRI90

36°-3000K-CRI90

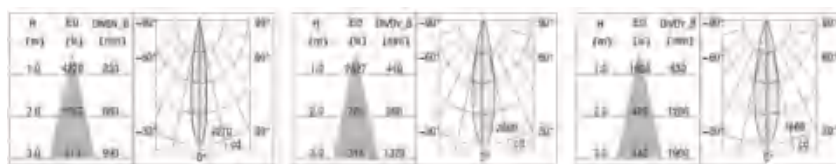


Accessories




SOLITE
SOFTENING
LENS



HONEY
COMB

Product series	LOLLO
Application areas	Accent lighting
Pan/tilt range	Fixed
Mounting	SURFACE MOUNTED
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.45kg
Test seal	




Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	size	Beam Angle	FUNTION
GMA143	7W	120LM/W	55mm	60*80mm	15°/24°/36°	ON/OFF DIM/DALI/0-10V

15°-3000K-CRI90

24°-3000K-CRI90

36°-3000K-CRI90

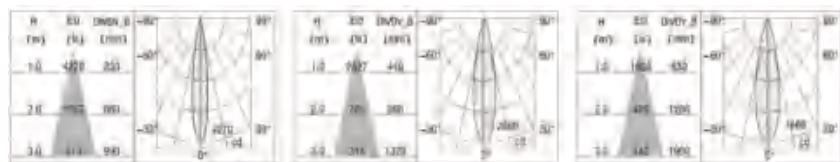


Accessories




SOLITE
SOFTENING
LENS



HONEY
COMB

Product series	LOLLO
Application areas	Accent lighting
Pan/tilt range	Fixed
Mounting	SURFACE MOUNTED
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.45kg
Test seal	




Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	size	Beam Angle	FUNTION
GMA143	9W	120LM/W	55mm	60*80mm	15°/24°/36°	ON/OFF DIM/DALI/0-10V

15°-3000K-CRI90

24°-3000K-CRI90

36°-3000K-CRI90

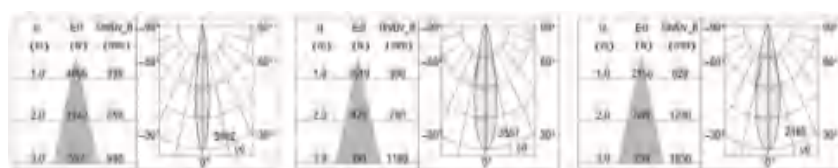






Accessories




SOLITE
SOFTENING
LENS



HONEY
COMB


Product series	LOLLO
Application areas	Accent lighting
Pan/tilt range	Fixed
Mounting	SURFACE MOUNTED
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.6kg
Test seal	    




Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	size	Beam Angle	FUNTION
GMA143	12W	120LM/W	55mm	60*100mm	15°/24°/36°	ON/OFF DIM/DALI/0-10V


15°-3000K-CRI90

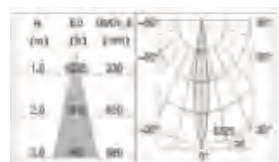

24°-3000K-CRI90

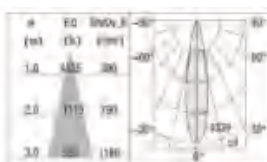

36°-3000K-CRI90

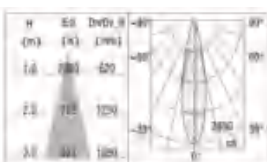


Accessories




SOLITE
SOFTENING
LENS



HONEY
COMB

Product series	LOLLO
Application areas	Accent lighting
Pan/tilt range	Fixed
Mounting	SURFACE MOUNTED
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.45kg
Test seal	




Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	size	Beam Angle	FUNTION
GMA145	9W	120LM/W	75mm	83*75mm	15°/24°/36°	ON/OFF DIM/DALI/0-10V

15°-3000K-CRI90

24°-3000K-CRI90

36°-3000K-CRI90

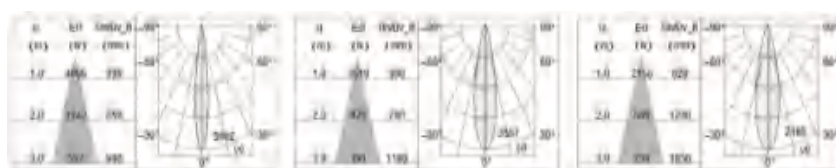


Accessories




SOLITE
SOFTENING
LENS



HONEY
COMB

Product series	LOLLO
Application areas	Accent lighting
Pan/tilt range	Fixed
Mounting	SURFACE MOUNTED
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.6kg
Test seal	




Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	size	Beam Angle	FUNTION
GMA145	12W	120LM/W	75mm	83*75mm	15°/24° /36°	ON/OFF DIM/DALI/0-10V

15°-3000K-CRI90

24°-3000K-CRI90

36°-3000K-CRI90

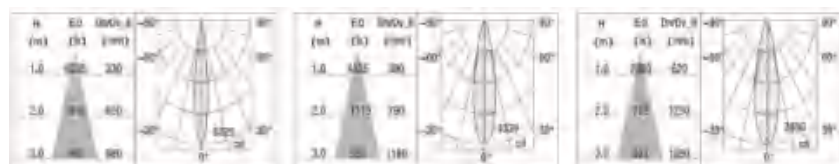






Accessories




SOLITE
SOFTENING
LENS



HONEY
COMB

Product series	LOLLO
Application areas	Accent lighting
Pan/tilt range	Fixed
Mounting	SURFACE MOUNTED
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.6kg
Test seal	    



Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	size	Beam Angle	FUNTION
GMA145	15W	120LM/W	75mm	83*75mm	15°/24° /36°	ON/OFF DIM/DALI/0-10V

15°-3000K-CRI90

24°-3000K-CRI90

36°-3000K-CRI90



Accessories



SOLITE
SOFTENING
LENS



HONEY
COMB

LOLLO-T





LOLLO-T

Lollo-T is a family series of Lollow , the differences is trimless , more elegant and simplicity .



UNIQUE DESIGN

Trimless, more simplicity
Embedded deep anti glare sky lantern
Modular structure design





LOW GLARE






Second reflective deep anti glare design
UGR<17

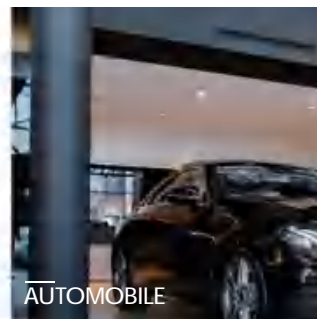


FLEXIBLE

It modular design which can easy installation replace the light without any damage to the ceiling .



Product series	LOLLO-T
Application areas	Accent lighting
Pan/tilt range	Fixed
Mounting	SURFACE MOUNTED
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.458kg
Test seal	    




Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	size	Beam Angle	FUNTION
GMA041	5W	120LM/W	40mm	46*65mm	15°/24° /36°	ON/OFF DIM/DALI/0-10V

15°-3000K-CRI90

24°-3000K-CRI90

36°-3000K-CRI90

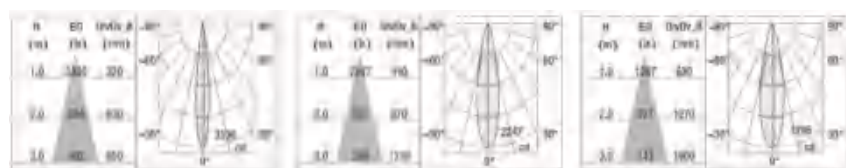


Accessories




SOLITE
SOFTENING
LENS



HONEY
COMB

Product series	LOLLO-T
Application areas	Accent lighting
Pan/tilt range	Fixed
Mounting	SURFACE MOUNTED
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.594kg
Test seal	




Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	size	Beam Angle	FUNTION
GMA041	7W	120LM/W	40mm	46*80mm	15°/24° /36°	ON/OFF DIM/DALI/0-10V

15°-3000K-CRI90

24°-3000K-CRI90

36°-3000K-CRI90

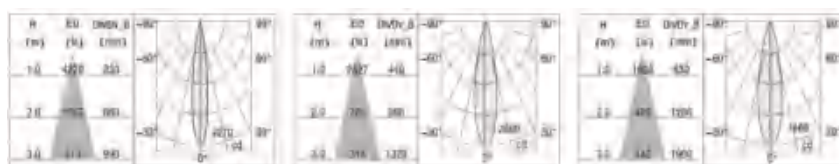


Accessories




SOLITE
SOFTENING
LENS



HONEY
COMB

Product series	LOLLO-T
Application areas	Accent lighting
Pan/tilt range	Fixed
Mounting	SURFACE MOUNTED
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.61kg
Test seal	




Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	size	Beam Angle	FUNTION
GMA043	7W	120LM/W	55mm	58*80mm	15°/24° /36°	ON/OFF DIM/DALI/0-10V

15°-3000K-CRI90

24°-3000K-CRI90

36°-3000K-CRI90

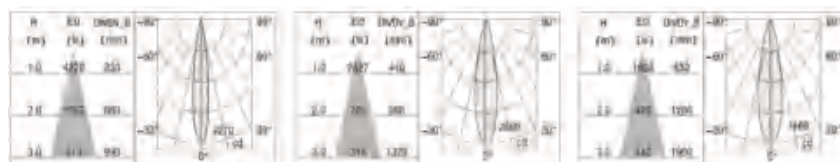


Accessories




SOLITE
SOFTENING
LENS



HONEY
COMB

Product series	LOLLO-T
Application areas	Accent lighting
Pan/tilt range	Fixed
Mounting	SURFACE MOUNTED
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.61kg
Test seal	




Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	size	Beam Angle	FUNTION
GMA043	9W	120LM/W	55mm	58*80mm	15°/24° /36°	ON/OFF DIM/DALI/0-10V

15°-3000K-CRI90

24°-3000K-CRI90


36°-3000K-CRI90

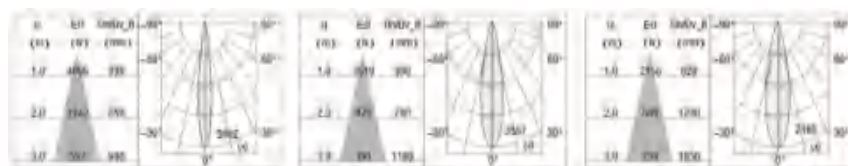


SOLITE
SOFTENING
LENS



HONEY
COMB


Product series	LOLLO-T
Application areas	Accent lighting
Pan/tilt range	Fixed
Mounting	SURFACE MOUNTED
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.61kg
Test seal	




Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	size	Beam Angle	FUNTION
GMA043	12W	120LM/W	55mm	58*100mm	15°/24° /36°	ON/OFF DIM/DALI/0-10V


15°-3000K-CRI90



24°-3000K-CRI90



36°-3000K-CRI90








Accessories




SOLITE
SOFTENING
LENS



HONEY
COMB

Product series	LOLLO-T
Application areas	Accent lighting
Pan/tilt range	Fixed
Mounting	SURFACE MOUNTED
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.45kg
Test seal	    




Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	size	Beam Angle	FUNTION
GMA044	9W	120LM/W	75mm	83*75mm	15°/24° /36°	ON/OFF DIM/DALI/0-10V

15°-3000K-CRI90

24°-3000K-CRI90

36°-3000K-CRI90

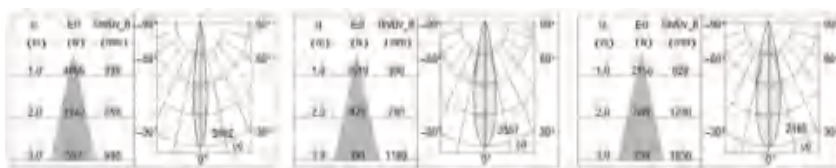


Accessories




SOLITE
SOFTENING
LENS



HONEY
COMB

Product series	LOLLO-T
Application areas	Accent lighting
Pan/tilt range	Fixed
Mounting	SURFACE MOUNTED
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.6kg
Test seal	




Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	size	Beam Angle	FUNTION
GMA044	12W	120LM/W	75mm	83*75mm	15°/24° /36°	ON/OFF DIM/DALI/0-10V

15°-3000K-CRI90

24°-3000K-CRI90

36°-3000K-CRI90

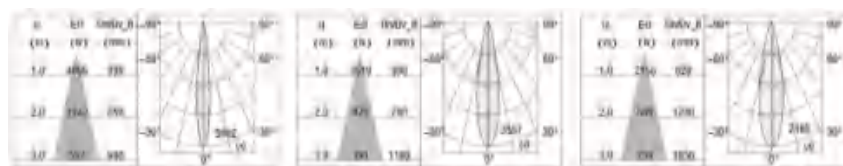






Accessories




SOLITE
SOFTENING
LENS



HONEY
COMB

Product series	LOLLO-T
Application areas	Accent lighting
Pan/tilt range	Fixed
Mounting	SURFACE MOUNTED
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.6kg
Test seal	    




Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	size	Beam Angle	FUNTION
GMA044	15W	120LM/W	75mm	83*75mm	15°/24° /36°	ON/OFF DIM/DALI/0-10V

15°-3000K-CRI90

24°-3000K-CRI90

36°-3000K-CRI90

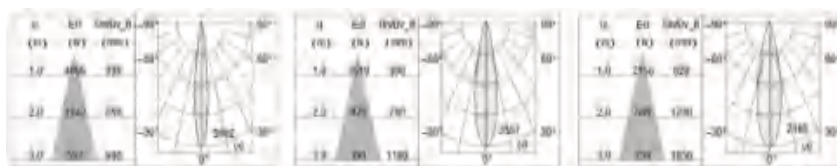

Accessories



SOLITE
SOFTENING
LENS



HONEY
COMB