












INFINIA

INFINIA is a high power grilles spot light, is widely use for high ceiling , to reach up to 10,000 lm requirement for Retail shop .

- 
WIDELY ROTATION
 355°turning range , 180°swiver range
- 
GOOD LIGHT OUTPUT
 Excellent and lower UGR , clear light shadow
- 
RA
 High CRI up to 97




Product series	INFINIA
Application areas	Accent lighting
Pan/tilt range	35° Swivel Range
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	80LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour,3500K, 4000K
Light colour Food*	M, M+F, BF
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On Request
Weight	0.5kg
Test seal	



Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	size	Beam Angle	CRI	FUNTION
GMG521	35W	80LM/W	□182*182mm	□200*200*H135mm	15°/30°/45°	90	ON/OFF DIM/DALI


30°-3000K-CRI90




Accessories




SOLITE
SOFTENING
LENS



HONEY
COMB


Product series	INFINIA
Application areas	Accent lighting
Pan/tilt range	35° Swivel Range
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	170LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour, 3500K, 4000K
Light colour Food*	M, M+F, BF
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On Request
Weight	1kg
Test seal	

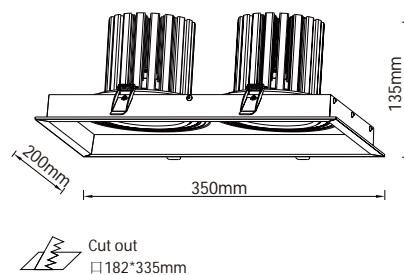

Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	size	Beam Angle	CRI	FUNTION
GMG522	35W*2	80LM/W	□182*335mm	□200*350*H135mm	15°/30°/45°	90	ON/OFF DIM/DALI


30°-3000K-CRI90




Accessories




SOLITE
SOFTENING
LENS



HONEY
COMB


Product series	INFINIA
Application areas	Accent lighting
Pan/tilt range	35° Swivel Range
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	170LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour,3500K, 4000K
Light colour Food*	M, M+F, BF
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On Request
Weight	1.6kg
Test seal	

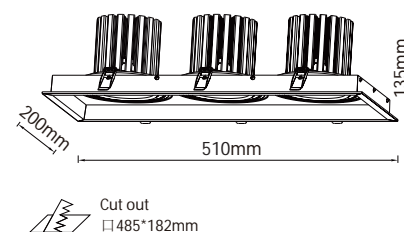

Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	size	Beam Angle	CRI	FUNTION
GMG523	35W*3	80LM/W	□485*182mm	□200*510*H135mm	15°/30°/45°	90	ON/OFF DIM/DALI


30°-3000K-CRI90



Accessories



SOLITE
SOFTENING
LENS



HONEY
COMB