






## MEGA-SUR




TEE series of advanced texture, light beam Angle switchable, with the special lens which more focus and clear light output.


 SIMPLE ZOOMABLE  
3: Twist the button behind the track rail head to zoom 15°/24°/36° beam light


 METHODS TO INSTALLATION  
Select track and surface installation according to requirements

 HIGH CRI  
High Color Rendering, Present The True Color

 APPLY TO  
Gallery, Jewelry Store, Exhibition, Showroom, Fashion Shop




Product series	MEGA-SUR
Application areas	Accent lighting
Pan/tilt range	355° turning range, 180° swivel range
Mounting	Surface Mounted
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 4000K, 5000K
Cooling	Passive
Supply unit	Driver Integrated
Luminaire colour	RAL 9005 jet black RAL 9016 traffic white Special colours on request
Surface	structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	on request
Weight	0.23kg
Test seal	

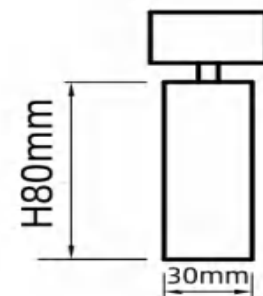


### Code composition/ Composizione del codice

Model	Power	Light flux	Bottom Shelf size	Size	Beam Angle	CRI	FUNTION
GMT501	5W	70LM/W	Ø52*30mm	Ø30*80mm	15°/24°/36°	90	ON/OFF DIM/DALI


15°-3000K-CRI90



24°-3000K-CRI90



36°-3000K-CRI90




### Accessories




SOLITE  
SOFTENING  
LENS



HONEY  
COMB


Product series	MEGA-SUR
Application areas	Accent lighting
Pan/tilt range	355° turning range, 180° swivel range
Mounting	Surface Mounted
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 4000K, 5000K
Cooling	Passive
Supply unit	Driver Integrated
Luminaire colour	RAL 9005 jet black RAL 9016 traffic white Special colours on request
Surface	structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	on request
Weight	0.23kg
Test seal	

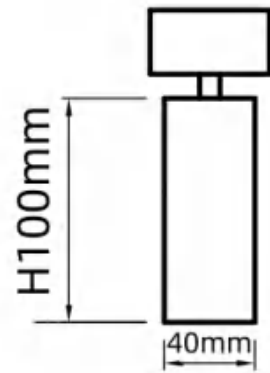


### Code composition/ Composizione del codice

Model	Power	Light flux	Bottom Shelf size	Size	Beam Angle	CRI	FUNTION
GMT501	10W	70LM/W	Ø52*30mm	Ø40*100mm	15°/24°/36°	90	ON/OFF DIM/DALI


15°-3000K-CRI90

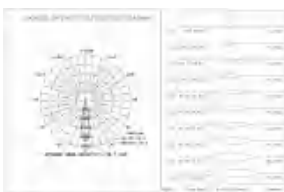

24°-3000K-CRI90



36°-3000K-CRI90




### Accessories




SOLITE  
SOFTENING  
LENS



HONEY  
COMB


Product series	MEGA-SUR
Application areas	Accent lighting
Pan/tilt range	355° turning range, 180° swivel range
Mounting	Surface Mounted
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 4000K, 5000K
Cooling	Passive
Supply unit	Driver Integrated
Luminaire colour	RAL 9005 jet black RAL 9016 traffic white Special colours on request
Surface	structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	on request
Weight	0.23kg
Test seal	

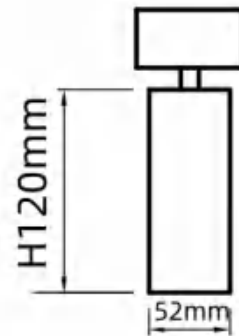

### Code composition/ Composizione del codice

Model	Power	Light flux	Bottom Shelf size	Size	Beam Angle	CRI	FUNTION
GMT501	12W	70LM/W	Ø52*30mm	Ø52*120mm	15°/24°/36°	90	ON/OFF DIM/DALI


15°-3000K-CRI90

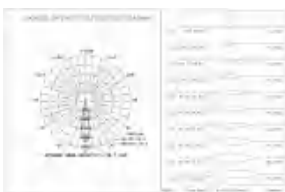

24°-3000K-CRI90



36°-3000K-CRI90




### Accessories




SOLITE  
SOFTENING  
LENS






HONEY  
COMB

Product series	MEGA-SUR
Application areas	Accent lighting
Pan/tilt range	355° turning range, 180° swivel range
Mounting	Surface Mounted
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 4000K, 5000K
Cooling	Passive
Supply unit	Driver Integrated
Luminaire colour	RAL 9005 jet black RAL 9016 traffic white Special colours on request
Surface	structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	on request
Weight	0.23kg
Test seal	

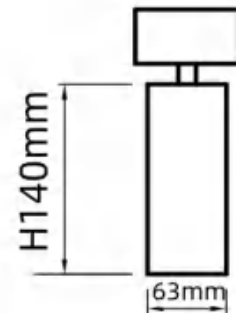

### Code composition/ Composizione del codice

Model	Power	Light flux	Bottom Shelf size	Size	Beam Angle	CRI	FUNTION
GMT501	18W	70LM/W	Ø72*32mm	Ø63*140mm	15°/24°/36°	90	ON/OFF DIM/DALI
15°-3000K-CRI90			24°-3000K-CRI90		36°-3000K-CRI90		

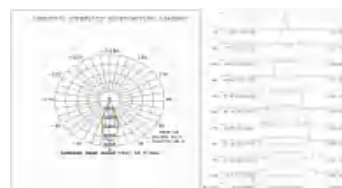

### Accessories



SOLITE  
SOFTENING  
LENS



HONEY  
COMB