








## ZOONA-EX


ZOONA-EX is zoomable product which can zoom from 15 to 60D, suitable for different display, flexible and elegant .


### MINIMALIST LIGHTING

 15D  
SMALL ANGLE  
Product more prominent in stores

 60D  
LARGE ANGLE  
Atmosphere  
Stronger in the shop




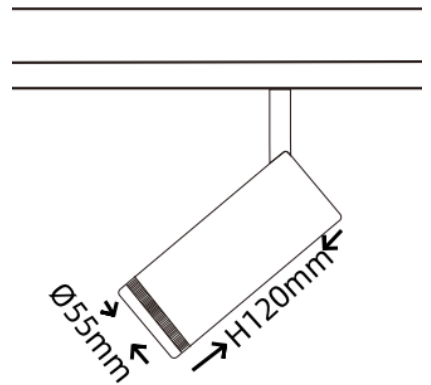
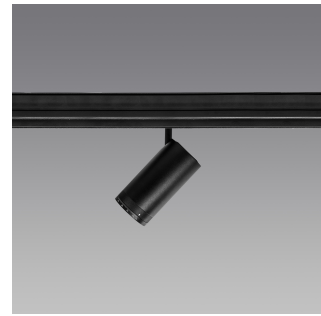
Product series	ZOONA
Application areas	Accent lighting
Pan/tilt range	355° turning range, 180° swivel range
Mounting	Power Track, not suitable for vertical mounting
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700 K, 3000 K - Efficient White, 3000 K - Brilliant Colour, 3500 K, 4000 K
Light colour Food*	M, M+F, BF
Cooling	Passive
Supply unit	Driver Integrated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On request
Weight	0.4kg
Test seal	

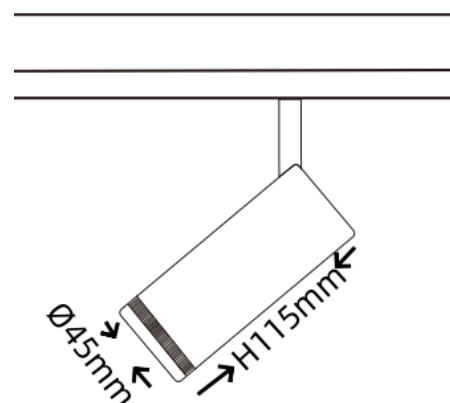

### Code composition/ Composizione del codice


Model	Power	Light flux	Size	Beam Angle	CRI	FUNTION
GMT701	10W	80LM/W	Ø45*115mm	15°-60°	90	ON/OFF DIM



Product series	ZOONA-EX
Application areas	Accent lighting
Pan/tilt range	355° turning range, 180° swivel range
Mounting	Power Track, not suitable for vertical mounting
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700 K, 3000 K - Efficient White, 3000 K - Brilliant Colour, 3500 K, 4000 K
Light colour Food*	M, M+F, BF
Cooling	Passive
Supply unit	Driver Integrated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On request
Weight	0.4kg
Test seal	



### Code composition/ Composizione del codice

Model	Power	Light flux	Size	Beam Angle	CRI	FUNTION
GMT701	15W	80LM/W	55*H120mm	15°-60°	90	ON/OFF DIM

Product series	ZOONA-EX
Application areas	Accent lighting
Pan/tilt range	355° turning range, 180° swivel range
Mounting	Power Track, not suitable for vertical mounting
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700 K, 3000 K - Efficient White, 3000 K - Brilliant Colour, 3500 K, 4000 K
Light colour Food*	M, M+F, BF
Cooling	Passive
Supply unit	Driver Integrated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On request
Weight	0.4kg
Test seal	

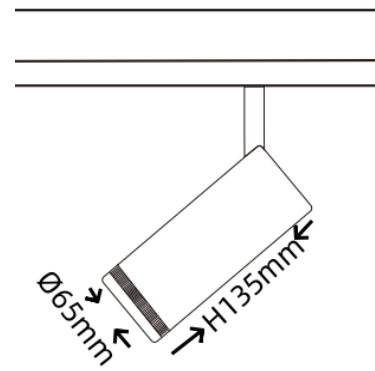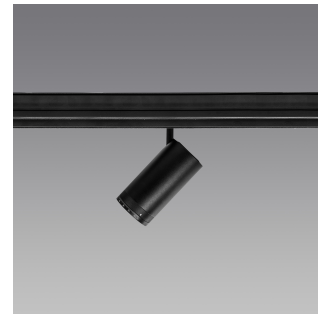

### Code composition/ Composizione del codice

Model	Power	Light flux	Size	Beam Angle	CRI	FUNTION
GMT701	20W	80LM/W	65*H135mm	15°-60°	90	ON/OFF DIM/DALI