




Product series	FORMA
Application areas	Accent lighting
Pan/tilt range	355° turning range, 90° swivel range
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour, 3500K, 4000K
Light colour Food*	M, M+F, BF
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.24kg
Test seal	




Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	size	Beam Angle	CRI	FUNTION
GMC516	7W	80LM/W	65mm	Ø72*H110mm	15°/24°/36°	90	ON/OFF DIM/DALI

24°-3000K-CRI90



36°-3000K-CRI90




Accessories




SOLITE
SOFTENING
LENS



HONEY
COMB


Product series	FORMA
Application areas	Accent lighting
Pan/tilt range	355° turning range, 90° swivel range
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour,3500K, 4000K
Light colour Food*	M, M+F, BF
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.24kg
Test seal	




Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	size	Beam Angle	CRI	FUNTION
GMC517	10W	80LM/W	75mm	Ø85*H115mm	15°/24°/36°	90	ON/OFF DIM/DALI


15°-3000K-CRI90



24°-3000K-CRI90



36°-3000K-CRI90




Accessories




SOLITE
SOFTENING
LENS



HONEY
COMB


Product series	FORMA
Application areas	Accent lighting
Pan/tilt range	355° turning range, 90° swivel range
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour,3500K, 4000K
Light colour Food*	M, M+F, BF
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.44kg
Test seal	

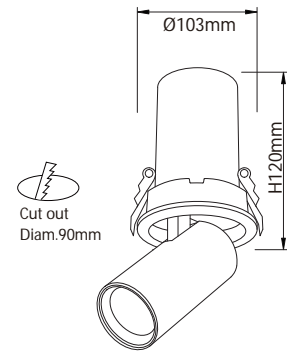


Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	size	Beam Angle	CRI	FUNTION
GMC519	15W	80LM/W	90mm	Ø103*H120mm	15°/24°/36°	90	ON/OFF DIM/DALI


15°-3000K-CRI90



24°-3000K-CRI90



36°-3000K-CRI90




Accessories




SOLITE
SOFTENING
LENS



HONEY
COMB


Product series	FORMA
Application areas	Accent lighting
Pan/tilt range	355° turning range, 90° swivel range
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour, 3500 K, 4000K
Light colour Food*	M, M+F, BF
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 0.90kg
Test seal	

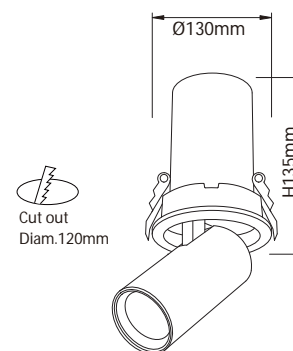


Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	size	Beam Angle	CRI	FUNTION
GMC510	25W	80LM/W	120mm	Ø130*H135mm	15°/24°/36°	90	ON/OFF DIM/DALI


15°-3000K-CRI90



24°-3000K-CRI90



36°-3000K-CRI90










Accessories




SOLITE
SOFTENING
LENS



HONEY
COMB


Product series	FORMA
Application areas	Accent lighting
Pan/tilt range	355° turning range, 90° swivel range
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000K - Brilliant Colour,3500K, 4000K
Light colour Food*	M, M+F, BF
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	220 - 240 V, 50/60Hz
Lighting controls	On Request
Weight	Approx. 1.1kg
Test seal	      




Code composition/ Composizione del codice

Model	Power	Light flux	Cut-off size	size	Beam Angle	CRI	FUNTION
GMC514	35W	80LM/W	140mm	Ø160*H155mm	15°/24°/36°	90	ON/OFF DIM/DALI

24°-3000K-CRI90



36°-3000K-CRI90



Accessories



SOLITE
SOFTENING
LENS



HONEY
COMB