











Product series	MEGA-C
Application areas	Accent lighting
Pan/tilt range	355° turning range, 180° swivel range
Mounting	Power Track, not suitable for vertical mounting
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700 K, 3000 K, 4000K, 5000 K
Cooling	Passive
Supply unit	Driver Integrated
Luminaire colour	RAL 9005 jet black RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	DC48V
Lighting controls	On request
Weight	0.12kg
Test seal	      




### Code composition/ Composizione del codice

Model	Power	Light flux	Size	Beam Angle	CRI	FUNTION
GMT501	5W	70-80LM/W	30*H80mm	15°/24°/36°	90	ON/OFF DIM/DALI


15°-3000K-CRI90












24°-3000K-CRI90



36°-3000K-CRI90




Product series	MEGA-C
Application areas	Accent lighting
Pan/tilt range	355° turning range, 180° swivel range
Mounting	Power Track, not suitable for vertical mounting
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700 K, 3000 K, 4000K, 5000 K
Cooling	Passive
Supply unit	Driver Integrated
Luminaire colour	RAL 9005 jet black RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	DC48V
Lighting controls	On request
Weight	0.14kg
Test seal	      

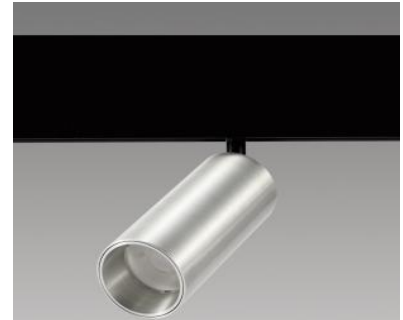


### Code composition/ Composizione del codice

Model	Power	Light flux	Size	Beam Angle	CRI	FUNTION
GMT501	10W	70-80LM/W	40*H100mm	15°/24°/36°	90	ON/OFF DIM/DALI


15°-3000K-CRI90





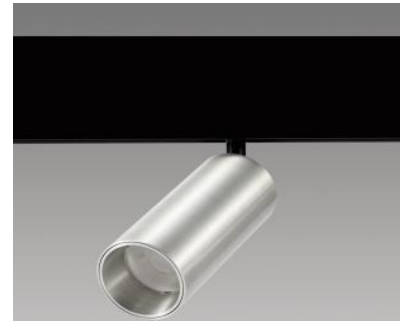
24°-3000K-CRI90



36°-3000K-CRI90




Product series	MEGA-C
Application areas	Accent lighting
Pan/tilt range	355° turning range, 180° swivel range
Mounting	Power Track, not suitable for vertical mounting
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700 K, 3000 K, 4000K, 5000 K
Cooling	Passive
Supply unit	Driver Integrated
Luminaire colour	RAL 9005 jet black RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	DC48V
Lighting controls	On request
Weight	0.22kg
Test seal	




### Code composition/ Composizione del codice

Model	Power	Light flux	Size	Beam Angle	CRI	FUNTION
GMT501	15W	70-80LM/W	52*H120mm	15°/24°/36°	90	ON/OFF DIM/DALI


15°-3000K-CRI90





24°-3000K-CRI90



36°-3000K-CRI90




Product series	MEGA-C
Application areas	Accent lighting
Pan/tilt range	355° turning range, 180° swivel range
Mounting	Power Track, not suitable for vertical mounting
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700 K, 3000 K, 4000K, 5000 K
Cooling	Passive
Supply unit	Driver Integrated
Luminaire colour	RAL 9005 jet black RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	DC48V
Lighting controls	On request
Weight	0.12kg
Test seal	




### Code composition/ Composizione del codice

Model	Power	Light flux	Size	Beam Angle	CRI	FUNTION
GMT501	5W	70-80LM/W	30*H80mm	15°/24°/36°	90	ON/OFF DIM/DALI


15°-3000K-CRI90





24°-3000K-CRI90



36°-3000K-CRI90




Product series	MEGA-C
Application areas	Accent lighting
Pan/tilt range	355° turning range, 180° swivel range
Mounting	Power Track, not suitable for vertical mounting
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700 K, 3000 K, 4000K, 5000 K
Cooling	Passive
Supply unit	Driver Integrated
Luminaire colour	RAL 9005 jet black RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	DC48V
Lighting controls	On request
Weight	0.14kg
Test seal	




### Code composition/ Composizione del codice

Model	Power	Light flux	Size	Beam Angle	CRI	FUNTION
GMT501	10W	70-80LM/W	40*H100mm	15°/24°/36°	90	ON/OFF DIM/DALI


15°-3000K-CRI90





24°-3000K-CRI90



36°-3000K-CRI90




Product series	MEGA-C
Application areas	Accent lighting
Pan/tilt range	355° turning range, 180° swivel range
Mounting	Power Track, not suitable for vertical mounting
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700 K, 3000 K, 4000K, 5000 K
Cooling	Passive
Supply unit	Driver Integrated
Luminaire colour	RAL 9005 jet black RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	DC48V
Lighting controls	On request
Weight	0.22kg
Test seal	




### Code composition/ Composizione del codice

Model	Power	Light flux	Size	Beam Angle	CRI	FUNTION
GMT501	15W	70-80LM/W	52*H120mm	15°/24°/36°	90	ON/OFF DIM/DALI


15°-3000K-CRI90





24°-3000K-CRI90



36°-3000K-CRI90




Product series	MEGA-C
Application areas	Accent lighting
Pan/tilt range	355° turning range, 180° swivel range
Mounting	Power Track, not suitable for vertical mounting
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700 K, 3000 K, 4000K, 5000 K
Cooling	Passive
Supply unit	Driver Integrated
Luminaire colour	RAL 9005 jet black RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	DC48V
Lighting controls	On request
Weight	0.12kg
Test seal	




### Code composition/ Composizione del codice

Model	Power	Light flux	Size	Beam Angle	CRI	FUNTION
GMT501	5W	70-80LM/W	30*H80mm	15°/24°/36°	90	ON/OFF DIM/DALI


15°-3000K-CRI90





24°-3000K-CRI90



36°-3000K-CRI90




Product series	MEGA-C
Application areas	Accent lighting
Pan/tilt range	355° turning range, 180° swivel range
Mounting	Power Track, not suitable for vertical mounting
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700 K, 3000 K, 4000K, 5000 K
Cooling	Passive
Supply unit	Driver Integrated
Luminaire colour	RAL 9005 jet black RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	DC48V
Lighting controls	On request
Weight	0.14kg
Test seal	





### Code composition/ Composizione del codice

Model	Power	Light flux	Size	Beam Angle	CRI	FUNTION
GMT501	10W	70-80LM/W	40*H100mm	15°/24°/36°/55°	90	ON/OFF DIM

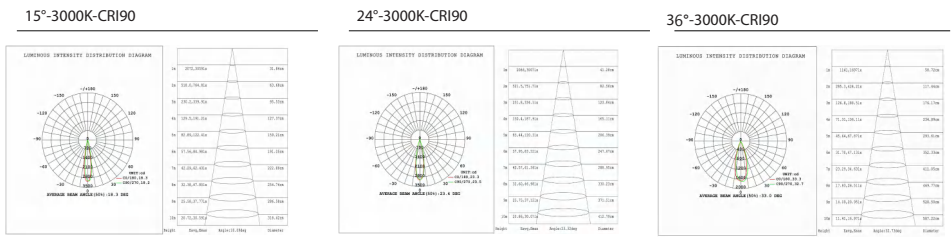




Product series	MEGA-C
Application areas	Accent lighting
Pan/tilt range	355° turning range, 180° swivel range
Mounting	Power Track, not suitable for vertical mounting
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700 K, 3000 K, 4000K, 5000 K
Cooling	Passive
Supply unit	Driver Integrated
Luminaire colour	RAL 9005 jet black RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Nominal voltage	DC48V
Lighting controls	On request
Weight	0.22kg
Test seal	




### Code composition/ Composizione del codice

Model	Power	Light flux	Size	Beam Angle	CRI	FUNTION
GMT501	15W	70-80LM/W	52*H120mm	15°/24°/36°/55°	90	ON/OFF DIM

15°-3000K-CRI90



24°-3000K-CRI90



36°-3000K-CRI90

