



UNO-W

Developed for hotels, this modular bezel system extends the UNO series with tool-free module replacement, slashing maintenance costs. Interchangeable bezels offer diverse finishes (brushed metal, matte, glossy) and sizes for customized aesthetics. High-efficiency LEDs ensure uniform, low-glare illumination ($UGR < 19$), while modularity allows quick upgrades without full fixture replacement. Durable aviation aluminum housing and IP44-rated options suit humid environments. Backward-compatible with UNO bases, it combines flexibility, durability, and cost-efficiency for dynamic hospitality lighting.



WIDELY ROTATION
355°turning range , 180°swiver range



FLEXIBLE INSTALLATION











RA
High CRI up to 97



FLEXIBLE INSTALLATION
with 2 different size of the cutting hole 75mm, 95mm.



Product series	UNO-W
Application areas	Accent lighting
Pan/tilt range	35°tilted function
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000 K - Brilliant Colour,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Lighting controls	On Request
Weight	Approx.0.12KG
Test seal	      












Code composition/ Composizione del codice

Model	Cut-off size	size	Beam Angle	CRI	Function
GMA002	Ø75mm	Ø88*43mm	15°/24°/38°/50°	90/98	ON/OFF DIM/DALI/0-10V ZIGBEE

Accessories

SOLITE
SOFTENING
LENSHONEY
COMB


Product series	UNO-W
Application areas	Accent lighting
Pan/tilt range	35°tilted function
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000 K - Brilliant Colour,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Lighting controls	On Request
Weight	Approx.0.12KG
Test seal	      

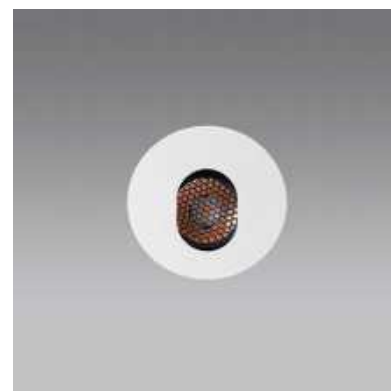








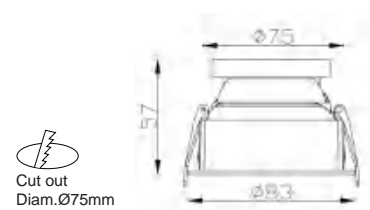
Code composition/ Composizione del codice

Model	Cut-off size	size	Beam Angle	CRI	Function
GMA002	Ø75mm	Ø88*43mm	15°/24°/38°/50°	90/98	ON/OFF DIM/DALI/0-10V ZIGBEE

Accessories

SOLITE
SOFTENING
LENSHONEY
COMB

Product series	UNO-W
Application areas	Accent lighting
Pan/tilt range	35°tilted function
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000 K - Brilliant Colour,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Lighting controls	On Request
Weight	Approx.0.08KG
Test seal	      











Code composition/ Composizione del codice

Model	Cut-off size	size	Beam Angle	CRI	Function
GMA001	Ø75mm	Ø83*57mm	15°/24°/38°/50°	90/98	ON/OFF DIM/DALI/0-10V ZIGBEE

Accessories

SOLITE
SOFTENING
LENS

Product series	UNO-W
Application areas	Accent lighting
Pan/tilt range	35°tilted function
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000 K - Brilliant Colour,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Lighting controls	On Request
Weight	Approx.0.08KG
Test seal	      

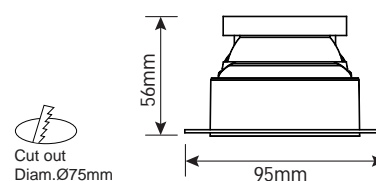









Code composition/ Composizione del codice

Model	Cut-off size	size	Beam Angle	CRI	Function
GMA001	Ø75mm	Ø95*56mm	15°/24°/38°/50°	90/98	ON/OFF DIM/DALI/0-10V ZIGBEE

Accessories

SOLITE
SOFTENING
LENS

Product series	UNO-W
Application areas	Accent lighting
Pan/tilt range	35°tilted function
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000 K - Brilliant Colour,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Lighting controls	On Request
Weight	Approx.0.11KG
Test seal	      

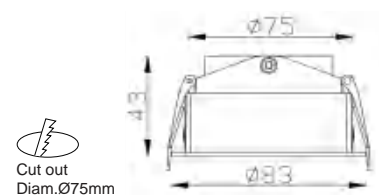









Code composition/ Composizione del codice

Model	Cut-off size	size	Beam Angle	CRI	Function
GMA001	Ø75mm	Ø83*40mm	15°/24°/38°/50°	90/98	ON/OFF DIM/DALI/0-10V ZIGBEE

Accessories

SOLITE
SOFTENING
LENS


Product series	UNO-W
Application areas	Accent lighting
Pan/tilt range	35°tilted function
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000 K - Brilliant Colour,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Lighting controls	On Request
Weight	Approx.0.11KG
Test seal	      

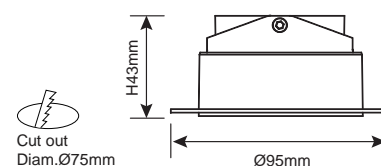








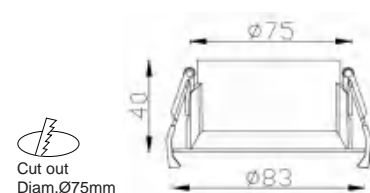
Code composition/ Composizione del codice

Model	Cut-off size	size	Beam Angle	CRI	Function
GMA001	Ø75mm	Ø95*43mm	15°/24°/38°/50°	90/98	ON/OFF DIM/DALI/0-10V ZIGBEE

Accessories

SOLITE
SOFTENING
LENS

Product series	UNO-W
Application areas	Accent lighting
Pan/tilt range	35°tilted function
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000 K - Brilliant Colour,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Lighting controls	On Request
Weight	Approx.0.11KG
Test seal	      











Code composition/ Composizione del codice

Model	Cut-off size	size	Beam Angle	CRI	Function
GMA001	Ø75mm	Ø83*43mm	15°/24°/38°/50°	90/98	ON/OFF DIM/DALI/0-10V ZIGBEE

Accessories

SOLITE
SOFTENING
LENS

Product series	UNO-W
Application areas	Accent lighting
Pan/tilt range	35°tilted function
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000 K - Brilliant Colour,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Lighting controls	On Request
Weight	Approx.0.11KG
Test seal	      

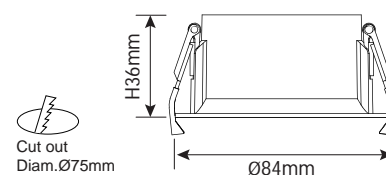









Code composition/ Composizione del codice

Model	Cut-off size	size	Beam Angle	CRI	Function
GMA001	Ø75mm	Ø84*36mm	15°/24°/38°/50°	90/98	ON/OFF DIM/DALI/0-10V ZIGBEE

Accessories

SOLITE
SOFTENING
LENS

Product series	UNO-W
Application areas	Accent lighting
Pan/tilt range	35°tilted function
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000 K - Brilliant Colour, 3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Lighting controls	On Request
Weight	Approx.0.09KG
Test seal	      

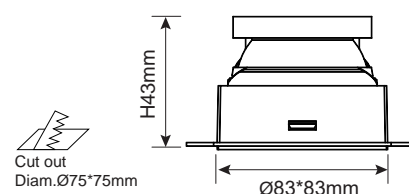










Code composition/ Composizione del codice

Model	Cut-off size	size	Beam Angle	CRI	Function
GMA001	□75*75mm	□83*83*43mm	15°/24°/38°/50°	90/98	ON/OFF DIM/DALI/0-10V ZIGBEE

Accessories

SOLITE
SOFTENING
LENS

Product series	UNO-W
Application areas	Accent lighting
Pan/tilt range	35°tilted function
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000 K - Brilliant Colour,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Lighting controls	On Request
Weight	Approx.0.09KG
Test seal	      

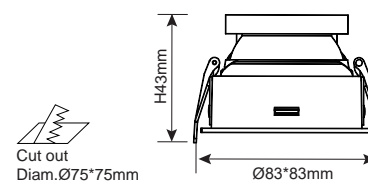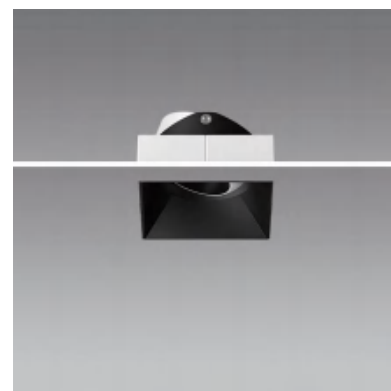









Code composition/ Composizione del codice

Model	Cut-off size	size	Beam Angle	CRI	Function
GMA001	□75*75mm	□83*83*43mm	15°/24°/38°/50°	90/98	ON/OFF DIM/DALI/0-10V ZIGBEE

Accessories

SOLITE
SOFTENING
LENS

Product series	UNO-W
Application areas	Accent lighting
Pan/tilt range	35°tilted function
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000 K - Brilliant Colour,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Lighting controls	On Request
Weight	Approx.0.14KG
Test seal	      

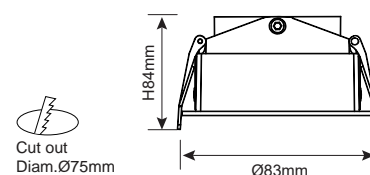









Code composition/ Composizione del codice

Model	Cut-off size	size	Beam Angle	CRI	Function
GMA001	Ø75mm	Ø83*43mm	15°/24°/38°/50°	90/98	ON/OFF DIM/DALI/0-10V ZIGBEE

Accessories

SOLITE
SOFTENING
LENS

Product series	UNO-W
Application areas	Accent lighting
Pan/tilt range	35°tilted function
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000 K - Brilliant Colour,3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Lighting controls	On Request
Weight	Approx.0.22KG
Test seal	      

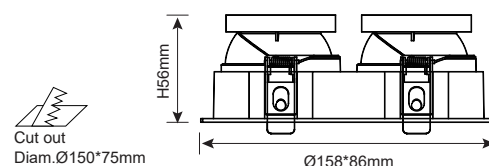









Code composition/ Composizione del codice

Model	Cut-off size	size	Beam Angle	CRI	Function
GMA001	□150*75mm	□158*86*56mm	15°/24°/38°/50°	90/98	ON/OFF DIM/DALI/0-10V ZIGBEE

Accessories

SOLITE
SOFTENING
LENS

Product series	UNO-W
Application areas	Accent lighting
Pan/tilt range	35°tilted function
Mounting	Recessed
Lighting technology	LED
LED Luminous Flux Class	120LM/W
Light colour White	2700K, 3000K, 3000K - Efficient White, 3000 K - Brilliant Colour, 3500K, 4000K
Cooling	Passive
Supply unit	Driver Separated
Luminaire colour	RAL 9005 jet black RAL 9006 white aluminium RAL 9016 traffic white Special colours on request
Surface	Structure powder-coated
Lighting controls	On Request
Weight	Approx.0.22KG
Test seal	      

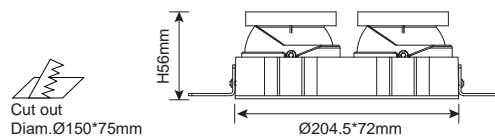

Code composition/ Composizione del codice

Model	Cut-off size	size	Beam Angle	CRI	Function
GMA001	□150*75mm	□204.5*72*56mm	15°/24°/38°/50°	90/98	ON/OFF DIM/DALI/0-10V ZIGBEE

Accessories

SOLITE
SOFTENING
LENS